


polytechnik


Transforming Biomass
Since 1965

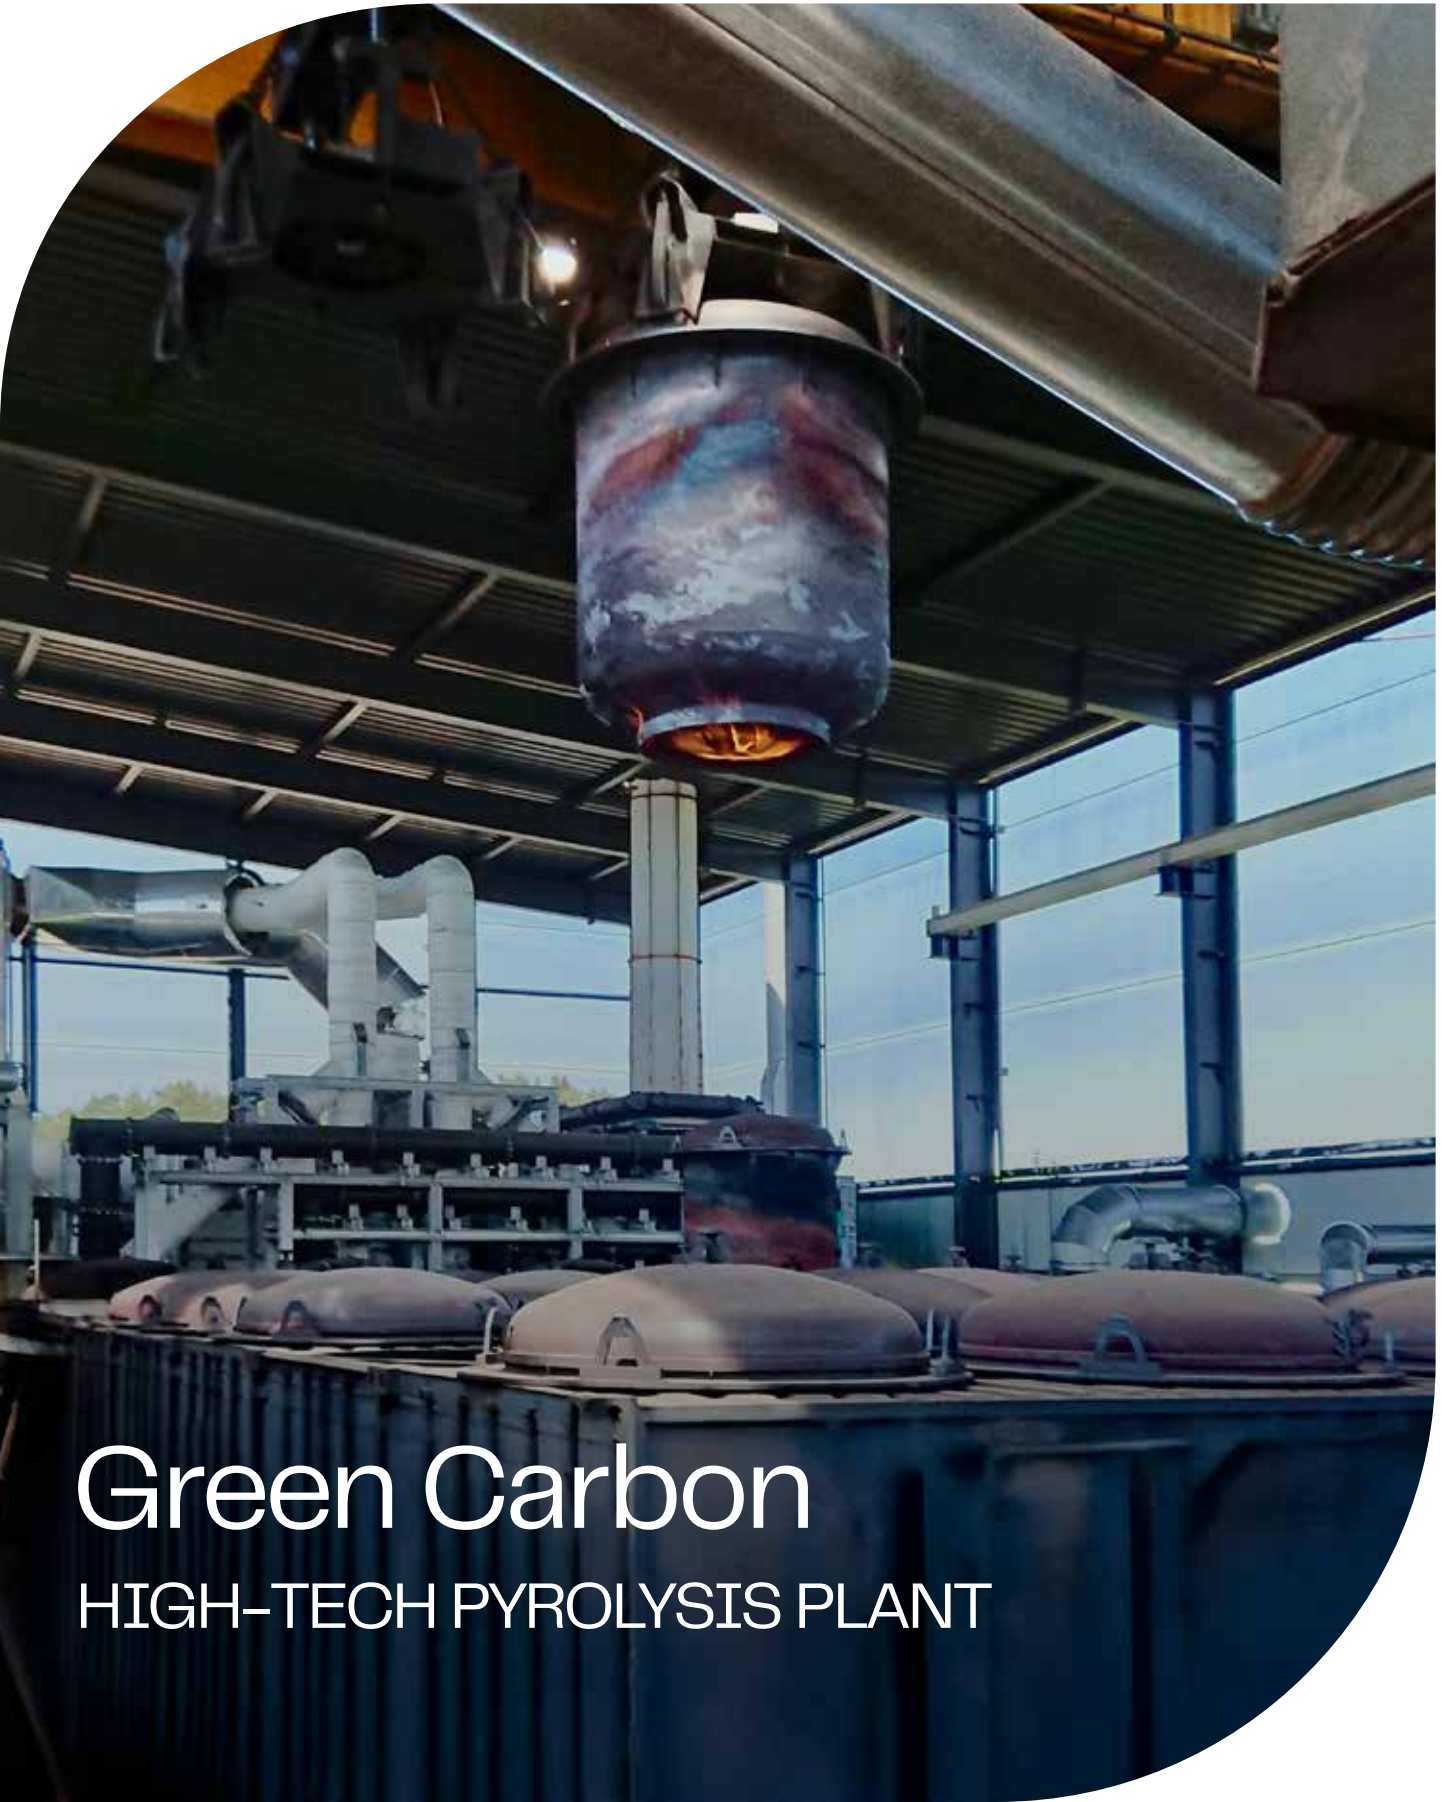

Green Carbon

HIGH-TECH PYROLYSIS PLANT

Carbon Negative vs Carbon Neutral

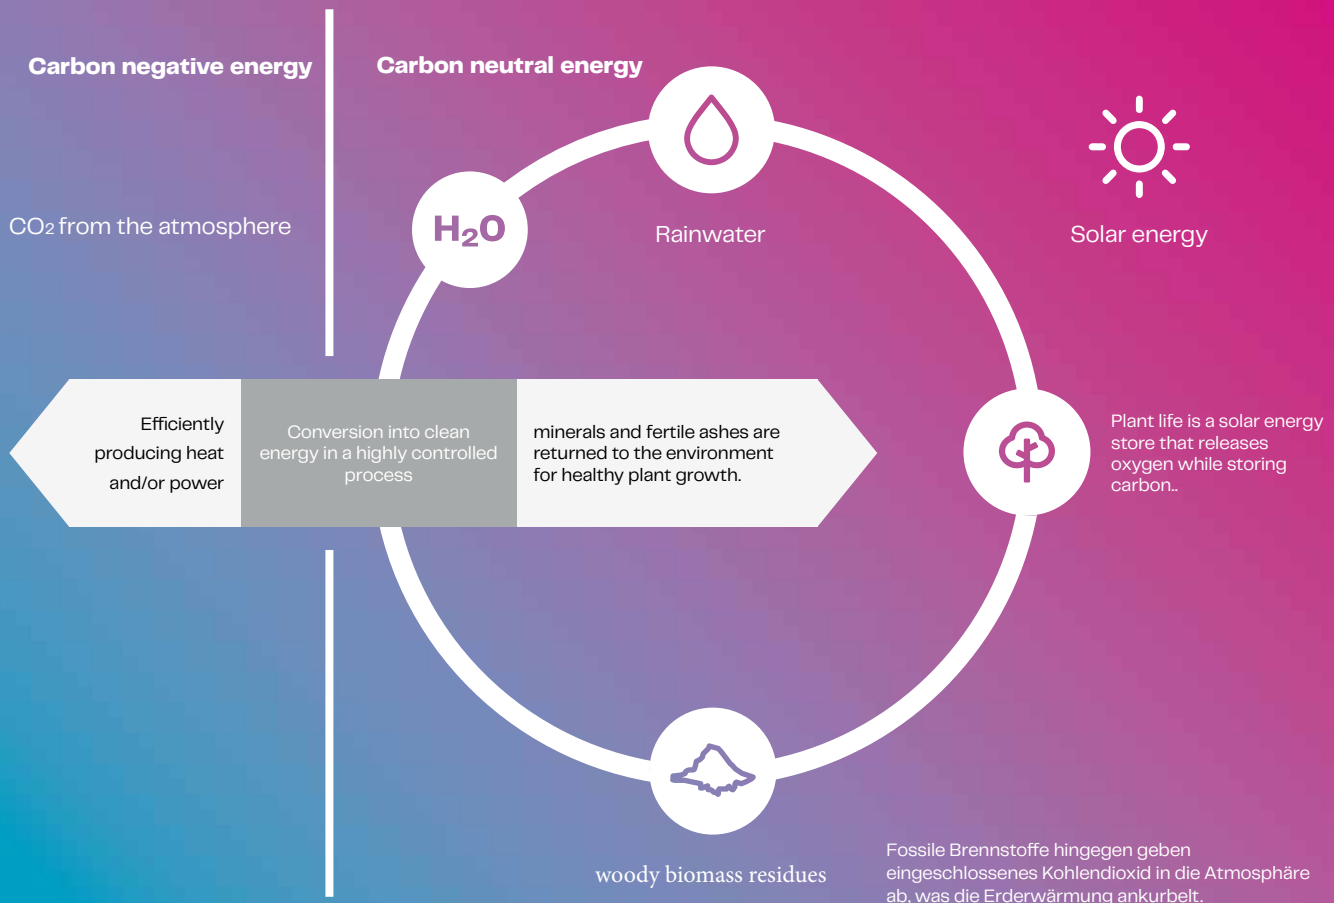

The movement of carbon in its various forms between the biosphere, atmosphere, oceans and the earth's crust is called the carbon cycle. The earth's natural balance also includes carbon storage in plants and soil, but human activity has disturbed this balance.

CARBON NEUTRAL ENERGY FROM BIOMASS

As plants grow, carbon dioxide is removed from the atmosphere through photosynthesis. This carbon dioxide is converted and stored in the biomass of the plant. The carbon is released when the plant dies, decays or burns. In Polytechnik's highly efficient energy plants, we use forest and wood residues from sustainable sources and collect the released carbon as a renewable, clean and carbon neutral form of energy.

CARBON NEGATIVE ENERGY BALANCE

Polytechnik's Green Carbon Technology can transfer approximately 50% of the plant's carbon into an inactive carbon pool, which means it is not released. This is done by processing it through pyrolysis under low-oxygen conditions. The remaining 50% of the carbon can be used for heat or electricity production – enabling you to produce biochar with up to 97% carbon and carbon negative energy at the same time (provided sustainable sources are used).

WHAT IS BIOCHAR?


All three forms of carbonaceous material are produced by pyrolysis – heating animal or plant matter in kilns or specially designed carbonisation plants under limited oxygen conditions. These materials are also referred to as PCM (pyrogenic carbonaceous matter).

Charcoal has been one of the basic materials of civilisation for thousands of years. It is produced by pyrolysis and used for cooking, heating and as a metallurgical fuel in smelting and refining processes for iron ore, steel, pure silicon and ferrosilicon.

Biochar is produced under limited oxygen conditions to maintain its unique agronomic and environmental properties. It has been found that thousands of years ago, pre-Columbian Amazonians used biochar to increase soil fertility.

The result was terra preta – an extremely fertile soil additive that binds minerals and nutrients and keeps them in the soil for thousands of years.

Activated carbon, also known as activated charcoal, is charcoal that has been chemically or physically treated to develop a interconnected series of pores inside it. This greater surface area makes it highly porous, meaning it can be used for various absorption applications.

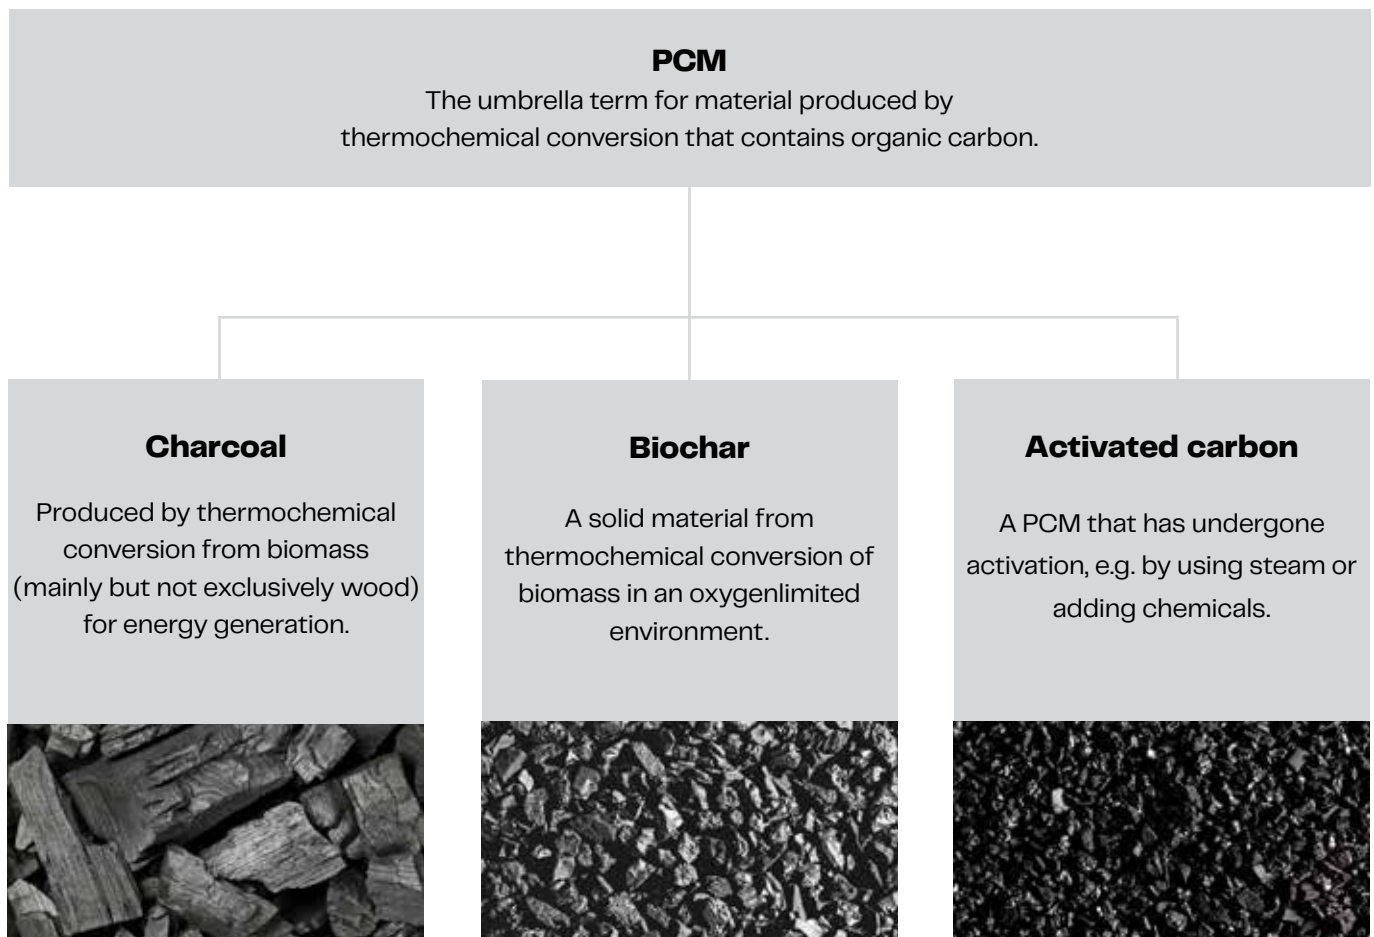

Carbon from agricultural residues is highly porous and can have a surface area of up to 400m²/g, depending on the raw material.

Biochar Advantages

Biochar has many applications and offers affordable and environmentally sustainable solutions across several industries. It traps carbon dioxide and prevents it from re-entering the atmosphere for thousands of years.

Organic Insulation

Biochar provides high-quality thermal, noise and building insulation, regulates moisture and absorbs odours and toxins. Biochar also improves the drying and curing process of concrete mixtures, increasing its strength.

Organic Substrate

Biochar is an effective soil substrate. It improves soil fertility by reducing the strength and density of the soil. This makes it easier for roots to grow and penetrate the soil and creates a habitat for microorganisms and fungi, which improves plant health.

Water Purifier

Its excellent adsorption capacity means it can be used to adsorb pollutants and decontaminate groundwater, soil, drinking water and wastewater. It can also act as a barrier for preventing pesticides and herbicides from getting into surface water.

Filter Charcoal

As a feed additive, biochar improves digestion and hygiene and strengthens the immune system; feed and energy efficiency boosts growth rates. It also reduces chronic botulism and methane production. It can be used as an adsorbent for emission control systems, for carbon enrichment in metallurgy and in the production of carbides (e.g. tungsten, silicon, etc.), and as a carbon source for tyres, rubber and plastics.

Fertiliser Saver

Biochar reduces the need for fertilisers and the leaching of nutrients and nitrates into groundwater. It improves plant growth, soil microbial biomass and water absorption and storage properties while reducing methane emissions.

Carbon Fibre

Biochar is a main source for producing pure carbon (e.g. for carbon fibre). It can also be used for electromagnetic shielding, in 3D printing and as a source for activated carbon production.

Source of Energy

Biochar in the form of charcoal is a high-quality energy source. It can also be used as a solution for energy storage (long-term carbon sink) or in semi-conductors, batteries and fuel cells.



Most common feedstock



Pellets



Briquettes



Wood shavings



Sawdust



Wood chips



Peelings



Shredded wood



Hog fuel



Forest residues



Bark



Bamboo



Waste wood



Agricultural residues



Miscanthus




Nutshells



Coconut fibres



Markets for Biochar

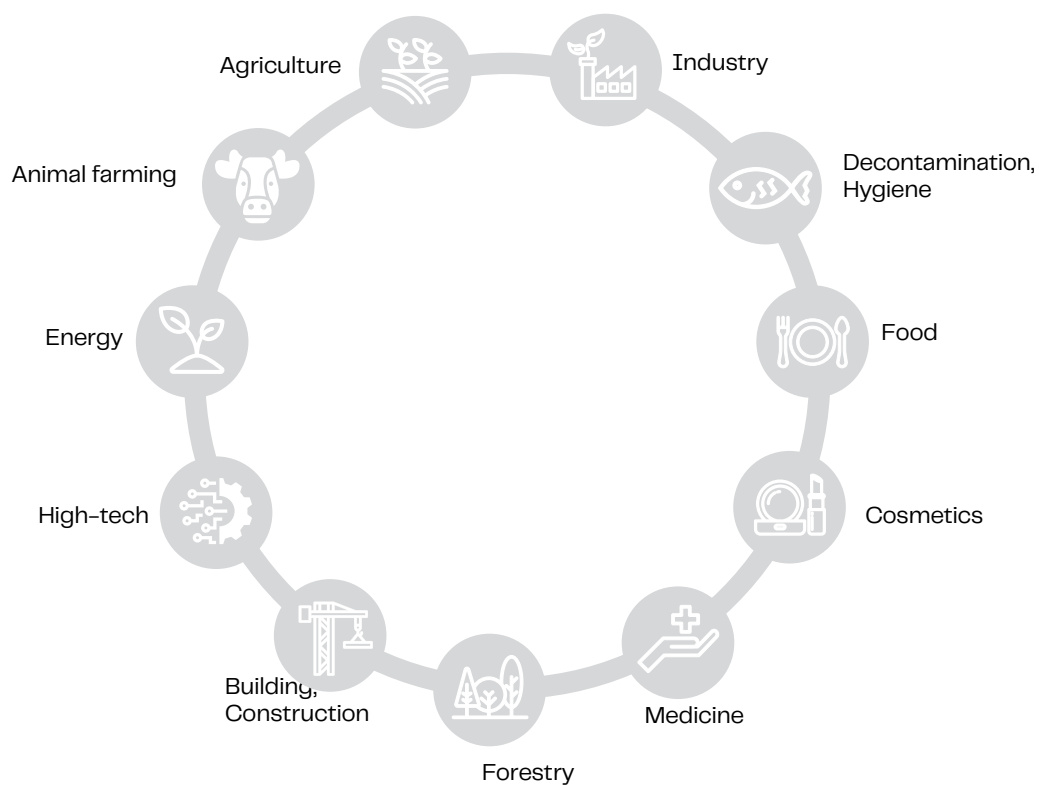



Polytechnik's pyrolysis plants offer great flexibility – different types of feedstock can be used to produce large amounts of high-quality charcoal products. At the same time, the plant also produces carbon-neutral heat and power (CHP).

The world's first fully automated pyrolysis plant not only produces high-quality and certified carbon products from biomass waste, but it also produces energy with emissions well below the European Union's strict limits. One possible technology that can be combined with the Green Carbon process is Polytechnik's ORC (Organic Rankine Cycle) plant.


The CHP plant includes fully automated fuel storage and handling systems that feed the combustion system of the plant with biomass.

The biomass is completely incinerated and the energy released is used to heat the heat transfer medium (thermal oil), which supplies high-temperature energy to an ORC unit. The electricity produced by the ORC unit can then be fed into the local grid and the thermal oil/hot water can be used for heating. The entire process is fully automated and can be controlled remotely by both operators and Polytechnik service experts.





Green Carbon Process

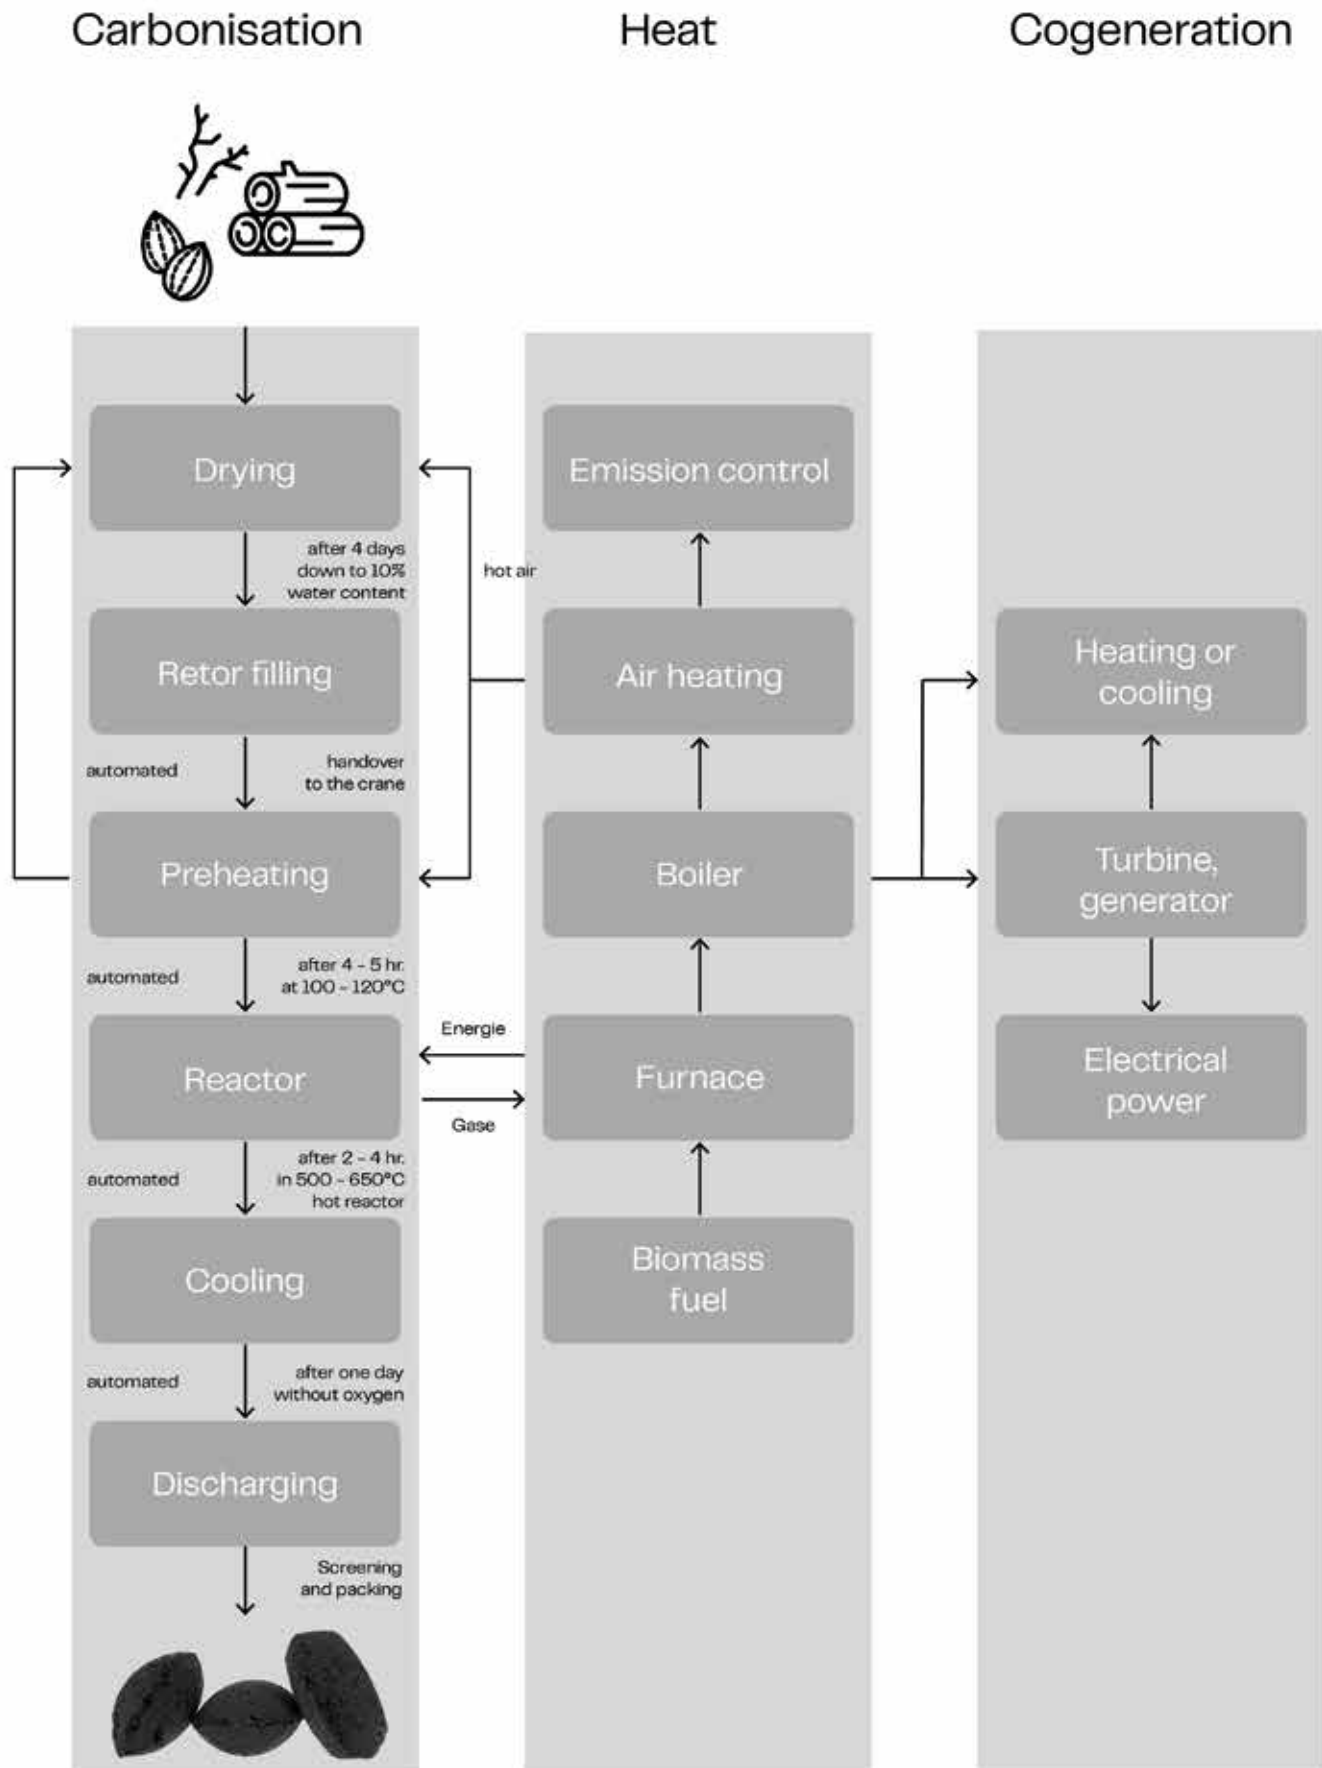

Green Carbon Process

1. Drying

The containers are filled with organic raw material and dried with hot air (waste energy from the pyrolysis process).

2. Retort Filling

After drying, the raw material (feedstock) is tipped into a receiving hopper and transported to the retort filling station, where an empty retort is waiting.

3. Preheating

The filled retorts are automatically transported to a connected preheating station to prepare the raw material for carbonisation. Here, the feedstock is heated with hot air. This reduces the time required in the pyrolysis station and increases the output of the plant.

4. Automated Material Transport


An indoor crane equipped with two separately operated lifting devices transports the retorts quickly and safely from station to station. The material movements are optimised to ensure continuous efficient operation of the energy plant and the pyrolysis station. Advanced automation ensures operational flexibility.


5. Furnace

The pyrolysis station is supplied with energy from a custom-built combustion system with a watercooled reciprocating grate for the combustion of the automatically fed feedstock. The combustion of the pyrolytic gases takes place in a specially designed combustion chamber via gas burners. Advanced controls, primary and secondary air systems and an adiabatic combustion chamber ensure complete oxidation of both biomass fuel and pyrolytic gases – resulting in high efficiency and low emissions.

6. Reactor

After preheating, the retorts are closed with airtight covers. Once a reactor has completed carbonisation, the reactor is opened and the crane removes the retort. The pyrolytic gases are directed to the burners of the combustion system, providing clean energy for the pyrolysis process.

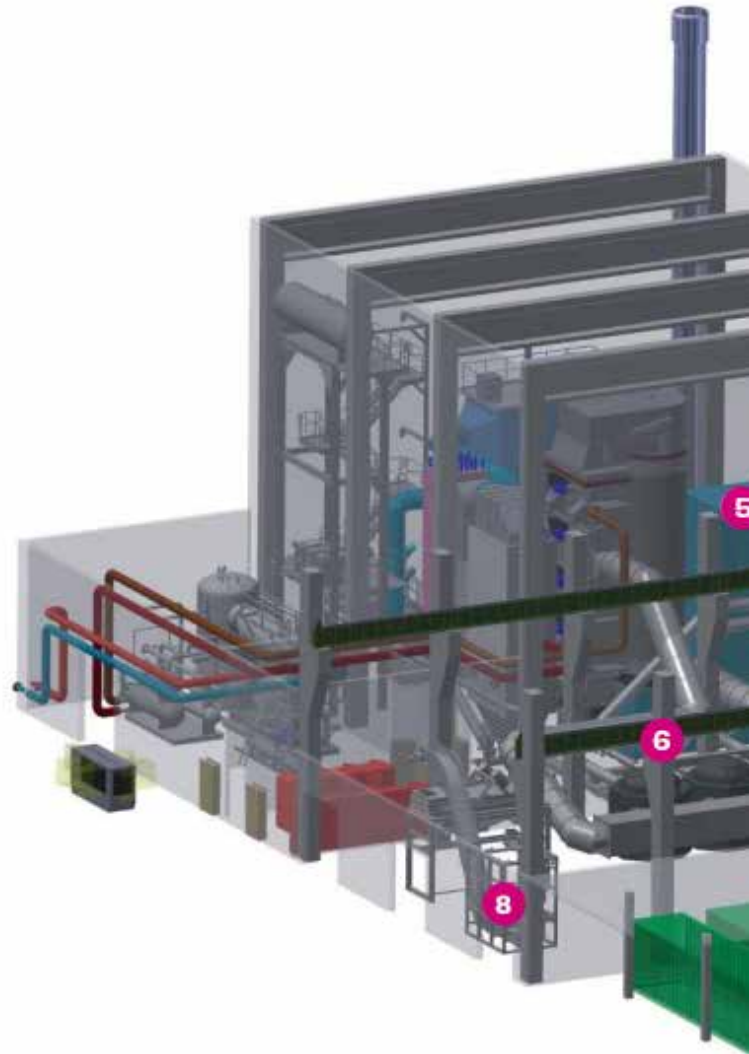

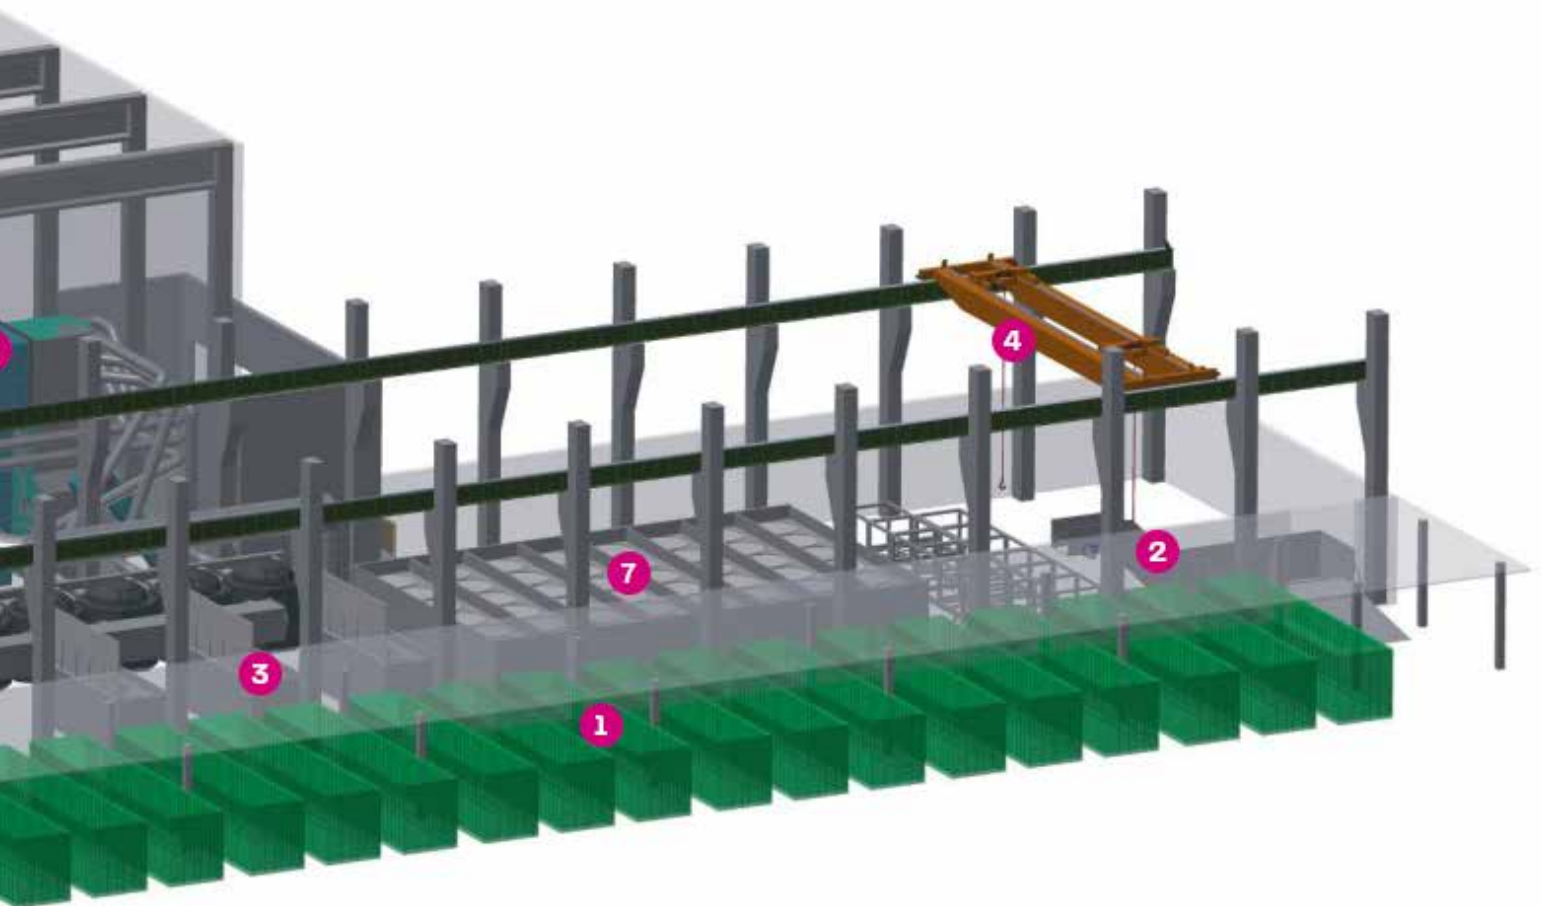


7. Cooling

After pyrolysis, the hot retorts are stored in a cooling station and brought to ambient temperature with cool air. To prevent further oxidation of the charcoal produced, the openings of the retorts are sealed with sand.

8. Discharging

The cold retorts are transported to a connected unloading station at the end of the process. A conveyor brings the charcoal to a screening or crushing station, allowing the customer to produce different product sizes. It is then transferred to the packaging station (e.g. bulk bags).

Transforming Biomass
Since 1965

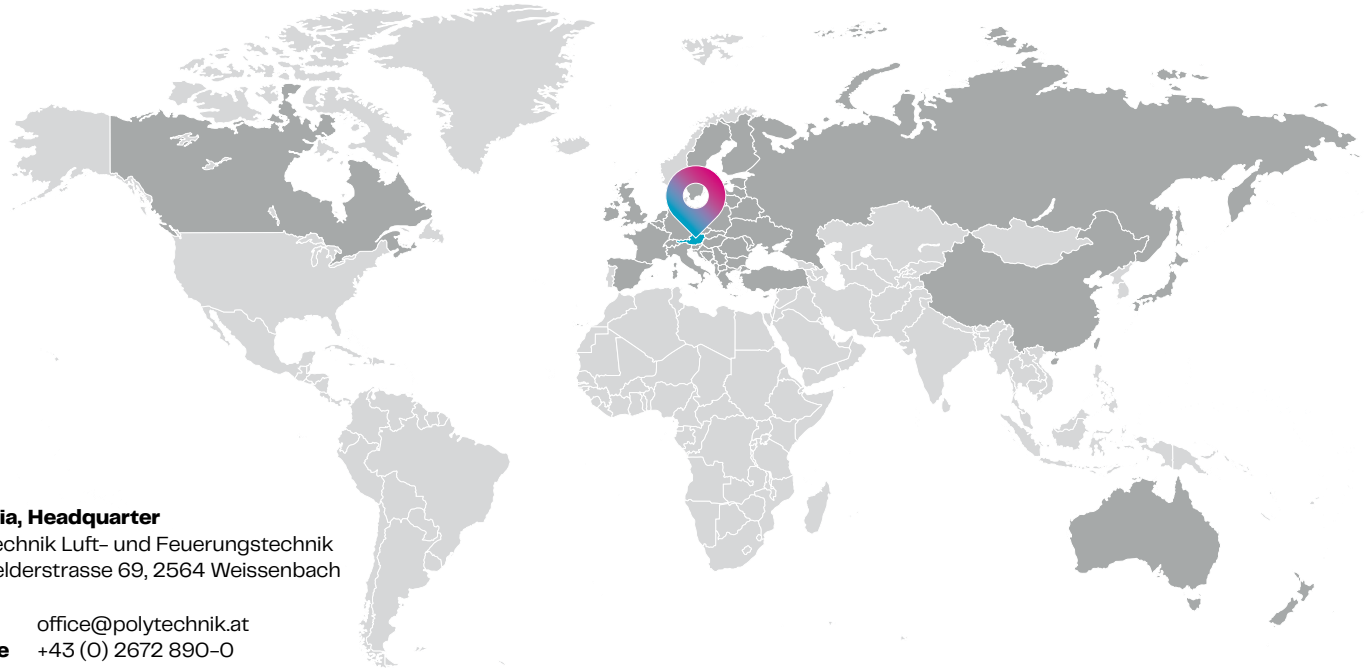

Austria, Headquarter

Polytechnik Luft- und Feuerungstechnik
Hainfelderstrasse 69, 2564 Weissenbach

Email office@polytechnik.at
Phone +43 (0) 2672 890-0

Polytechnik Gruppe

Hungary

Polytechnik Hungaria KFT
2133 Szödliget, Szeszgyár

Email office@polytechnik.hu
Phone +36 273 536 17

Romania

Polytechnik Sieta S.A.
98 Fabricii de Zahar St., Cluj Napoca
400624 Cluj

Email office@sieta.ro
Phone +40 (0) 264 415 032

Poland

Polytechnik Polska Sp.z o.o.
ul. Bytomska 14, 81509 Gdynia

Email biuro@polytechnik.com.pl
Phone +48 58-664-63-12

Germany

Polytechnik Deutschland GmbH
Mühlstraße 5, 71549 Auenwald

Email office@polytechnik.cc
Phone +49 (0) 7191 911 525-20

France and Benelux

Polytechnik S.A.R.L.
Le Grand Breuil N°8, 27190 Portes

Email contact@polytechnik.fr
Phone +33 (0)2 32 30 42 86

Southeast Europe

Polytechnik Luft und Feuerungstechnik
Ogranak Novi Sad, Narodnog fronta 89
21000 Novi Sad

Email v.radic@polytechnik.at
Phone + 381 65 202 6424

Eastern Europe

Email a.polyakov@polytechnik.at
Phone +43 676 849 104 42

Email m.koroleva@polytechnik.at
Phone +43 676 849 104 80

New Zealand and Australia

Polytechnik Biomass Energy Pty Ltd
Level 1, 207 Queen Street East,
Hastings 4122, New Zealand

Email office@polytechnik.co.nz
Phone +64 6 211 34 96

Switzerland

Polytechnik Swiss AG
Zentrum für neue Technologien
Calendariaweg 2, 6405 Immensee

Email swiss@polytechnik.ch
Phone +41 (0) 79 444 07 37

China, Joint Venture

Guangdong Polytechnik Bio-Energy Co., Ltd.
Jieyang, Guangdong, China

Email info@gdpolytechnik.cn
Phone +86 663-3993322

More locations at
<https://polytechnik.com/en/contact/>

